

Архангельск (8182)63-90-72
 Астана +7(7172)727-132
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Казань (843)206-01-48

Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78

Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93

Единый адрес для всех регионов: hcd@nt-rt.ru || www.hydac.nt-rt.ru

Electronic Speed Sensor HSS 120

Description:

The contact-free speed sensors of the HSS 120 series detect the movement of ferromagnetic structures, such as gear wheels, gear rims or perforated discs, using the changes in magnetic flux.

So each sensor has two Hall elements and the differential between the two signals is detected, evaluated and then converted into an output signal suitable for processing.

The instruments are available for different insertion depths. For integration into standard controls, standard output signals are available.

Due to their extremely compact design, the robust housing and protection class IP 69K, the instruments can be used in almost any application and any mounting position.

The main fields of application are detection of speed and rotation direction on gear wheels with a small module and high resolution, especially in vehicles and mobile machines with hydraulic drives.

Special features:

- 2-channel Hall differential sensor
- Wide frequency range
- Alignment required when installing
- Large air gap



Technical data:

Input data	
Frequency range	0.1 .. 20,000 Hz
Probe length	30; 35; 45 mm
probe diameter	15 / 12 mm
Max. pressure on sensing surface	15 bar, dynamic
Air gap / installation distance	Probe length: 30 mm 35 / 45 mm Module 1: 0.2 .. 1.0 mm 0.2 .. 1.3 mm Module 1.25: 0.2 .. 1.5 mm 0.2 .. 1.8 mm Module 1.5: 0.2 .. 1.7 mm 0.2 .. 2.0 mm Module 2: 0.2 .. 2.2 mm 0.2 .. 2.5 mm Module 2.5: 0.2 .. 3.2 mm 0.2 .. 3.5 mm
Mechanical connection	Flange, single, asymmetrical, cable outlet 90° (30 mm) / axial (35, 45 mm)
Type of installation	Dependent on direction (with asymmetrical flange)
Torque value	10 Nm
Housing material	Brass
Seal	FPM
Output data	
Variant	2-channel speed (90° / 270° phase shift for module 2)
Type	2 NPN frequency outputs
Switching capacity	≤ 50 mA ≥ 10 kΩ ohmic load ≤ 2.2 nF capacitive load
Direction of rotation	Flange on left, gear turns to right: channel A lagging; channel B leading
Signal level	LOW: ≤ 0.5 V HIGH: +U _B
Environmental conditions	
Operating temperature range	-40 .. +140 °C (-40 .. +160 °C for max. 500 operating hours)
Media resistance of housing	Salt water; various hydraulic oils; diesel oils; cleaning agent; salt spray
CE mark	DIN EN 60947-5-2
Vibration resistance to EN 60068-2-64	30 g, 10 .. 500 Hz, 100 min in each direction
Shock resistance to EN 60068-2-27 / -29	50 g, 11 ms, 3x in each direction 100 g, 6 ms, 3x in each direction
Protection class to IEC 60529 to ISO 20653	IP 67 IP 69K
Other data	
Electrical connection	Flying leads, 4-core, cable length 1 m
Supply voltage	7 .. 30 V DC
Residual ripple of supply voltage	≤ 5 %
Current consumption	< 30 mA at 30 V DC
Average life expectancy	200,000 h (MTTF)
Weight	~ 80 g

Note: Reverse polarity protection of the supply voltage and short circuit protection (max. 50 mA) are provided

Pin connections:


Core	HSS 120-2
brown	+U _B
blue	Frequency 1 (A)
black	0 V
white	Frequency 2 (B)

Adjustment angle for other modules:

It is possible to achieve a 90° phase shift of the two frequency signals by turning the sensor through the angle indicated in the table below.

-20°	Module 1	
-15°	Module 1.25	
-10°	Module 1.5	
± 0°	Module 2	± 0°
	Module 2.5	+15°

Specification for installation cavity:

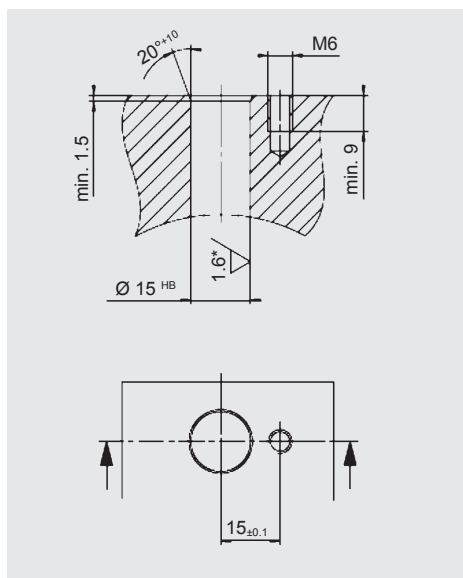

* For sealing function RA 1.6, otherwise 3.2

Model code:

HSS 1 2 0 - 2 - XXX - 000

Signal technology

2 = Outputs 1 and 2: Frequency (90° phase shift)

Probe length

030 = 30 mm

035 = 35 mm

045 = 45 mm

Modification number



000 = Standard

Notes:


On instruments with a different modification number, please read the label or the technical amendment details supplied with the instrument.

Dimensions:

Probe length (A): 35 mm, 45 mm

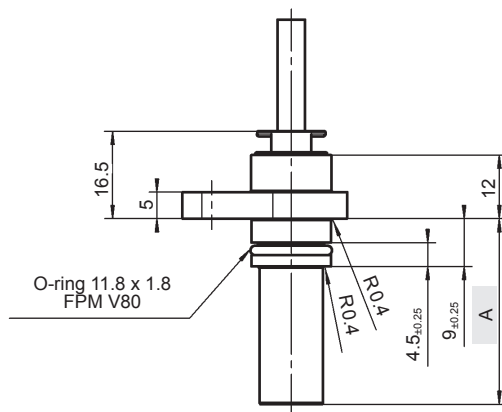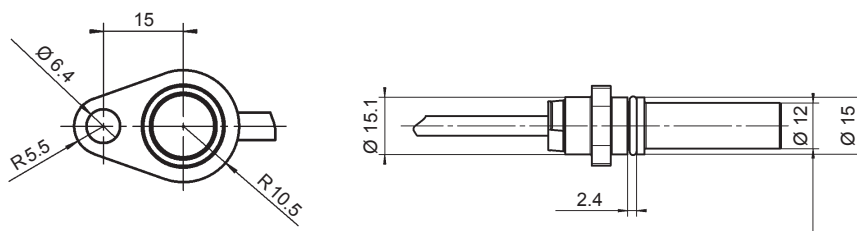

Probe length: 30 mm

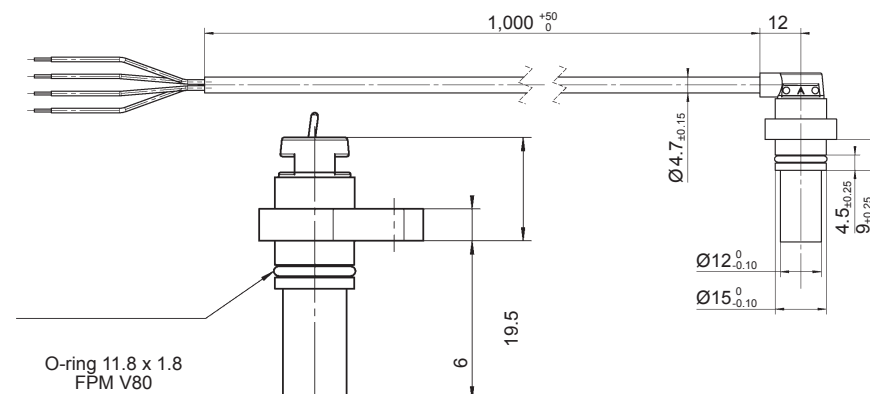

Архангельск (8182)63-90-72

Астана +7(7172)727-132

Белгород (4722)40-23-64

Брянск (4832)59-03-52

Владивосток (423)249-28-31

Волгоград (844)278-03-48

Вологда (8172)26-41-59

Воронеж (473)204-51-73

Екатеринбург (343)384-55-89

Иваново (4932)77-34-06

Ижевск (3412)26-03-58

Казань (843)206-01-48

Калининград (4012)72-03-81

Калуга (4842)92-23-67

Кемерово (3842)65-04-62

Киров (8332)68-02-04

Краснодар (861)203-40-90

Красноярск (391)204-63-61

Курск (4712)77-13-04

Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13

Москва (495)268-04-70

Мурманск (8152)59-64-93

Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12

Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73

Орел (4862)44-53-42

Оренбург (3532)37-68-04

Пенза (8412)22-31-16

Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15

Рязань (4912)46-61-64

Самара (846)206-03-16

Санкт-Петербург (812)309-46-40

Саратов (845)249-38-78

Смоленск (4812)29-41-54

Сочи (862)225-72-31

Ставрополь (8652)20-65-13

Тверь (4822)63-31-35

Томск (3822)98-41-53

Тула (4872)74-02-29

Тюмень (3452)66-21-18

Ульяновск (8422)24-23-59

Уфа (347)229-48-12

Челябинск (351)202-03-61

Череповец (8202)49-02-64

Ярославль (4852)69-52-93

Единый адрес для всех регионов: hcd@nt-rt.ru || www.hydac.nt-rt.ru