

Архангельск (8182)63-90-72
 Астана +7(7172)727-132
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Казань (843)206-01-48

Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78

Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93

Единый адрес для всех регионов: hcd@nt-rt.ru || www.hydac.nt-rt.ru

Electronic Flow Transmitter HFT 2100 for Oils / Viscous Fluids

Description:

The HFT 2100 series of HYDAC flow transmitters is based on the variable area float principle.

Irrespective of the installation position, the test medium deflects a spring-loaded float in the direction of flow, depending on the flow rate.

A Hall sensor which detects the position of the float, is fitted to the outside of the instrument and is therefore separate to the flow circuit.

In proportion to the deflection of the float, the sensor produces an analogue signal which corresponds to the particular measuring range.

The device is calibrated for vertical installation and for an upwards flow direction. The transmitter is designed to give reliable measurements within its accuracy range, even with changes in viscosity. The kinematic viscosity may vary between 30 and 600 cSt.

The areas of application include:

- Central lubrication systems
- Oil circuit lubrication systems
- Transformers
- Cooling systems and circuits
- Lubrication circuits
- Hydraulic systems
- Pumps
- Welding machines and laser systems
- Chemical industry
- Research & development

Medium:

- Oils / viscous fluids



Technical data:

Input data

Measuring ranges [l/min]	Size 1	Size 2
	0.5 .. 1.6	0.5 .. 1.5
	0.8 .. 3.0	1 .. 4
	2.0 .. 7.0	2 .. 8
		3 .. 10
		5 .. 15
		8 .. 24
		10 .. 30
		15 .. 45
		20 .. 60
		30 .. 90
		35 .. 110

Operating pressure		
Brass version	300 bar	250 bar
Stainless steel version	350 bar	300 bar
Pressure drop [bar]	0.02 .. 0.2	0.02 .. 0.4
Mechanical connection	See dimensions	
Parts in contact with medium		
Brass version	Stainl. st. 1.4571; FPM ¹⁾ ; Brass, nickel-plated; Brass; Hard ferrite	
Stainless steel version	Stainl. st. 1.4571; FPM ¹⁾ ; Hard ferrite	

Output data

Output signal	4 .. 20 mA, 3 conductor
	0 .. 10 V, 3 conductor
Accuracy ²⁾	≤ ± 10 % FS
Repeatability	1 % FS max.

Environmental conditions

Operating temperature range	-20 .. +70 °C
Fluid temperature range	-20 .. +70 °C
Viscosity range	30 .. 600 cSt
CE mark	Directive 2004 / 108 / EC
Protection class to IEC 60529	IP 67

Other data

Supply voltage	18 .. 30 V
Power consumption	< 1 W
Electrical connection	Male connection M12x1
Housing material	
Measuring body	Brass (nickel-plated) or st. steel 1.4571
Transmitter	Brass (nickel-plated)

Note: **FS (Full Scale)** = relative to the complete measuring range

¹⁾ Other seal materials available on request

²⁾ 3 % possible with calibration to a certain viscosity

Special features:

- Accuracy ≤ ± 10 % FS
- Viscosity compensation from 30 .. 600 cSt
- Any mounting position
- High level of functional reliability
- High pressure resistance
- Threaded connection

Model code:

HFT 2 1 X 6 - X - XXXX-XXXX - 7 - X - 0 - 000

Measuring principle

2 = Variable area float

Measuring medium

1 = Oils / viscous fluids

Mechanical connection

2) 3)

1 = 1/4 "

2 = 3/8 "

3 = 1/2 "

4 = 3/4 "

5 = 1 "

Electrical connection

6 = Male M12x1, 4 pole
(connector not supplied)

Output signal

B = 0 .. 10 V, 3 conductor

C = 4 .. 20 mA, 3 conductor

Measuring ranges in l/min ³⁾

Oil 10 % - Size 1 -

00.5-01.6; 00.8-03.0; 02.0-07.0

Oil 10 % -Size 2-

00.5-01.5; 0001-0004; 0002-0008; 0003-0010;
0005-0015; 0008-0024; 0010-0030; 0015-0045;
0020-0060; 0030-0090; 0035-0110

Accuracy

7 = $\leq \pm 10.0$ % FS

Housing material

B = Brass, nickel-plated

S = Stainless steel

Mechanical indicator

0 = Without indicator

Modification number

000 = Standard

2) Mechanical connection options depend on housing type
(see Dimensions)

3) Other models available on request.

Note:

Special models on request.


On instruments with a different modification number, please read the label or the technical amendment details supplied with the instrument.

Accessories:

Appropriate accessories, such as electrical connectors, can be found in the Accessories brochure.

Pin connections:

M12x1



Pin	HFT 21X6-C	HFT 21X6-B
1	+U _B	+U _B
2	reserved	reserved
3	GND	GND
4	4 .. 20 mA	0 .. 10 V

Notes on installation:



- The medium must not contain solid particles! We recommend using contamination strainers.
- External magnetic fields can affect the switching contact. Ensure sufficient distance from magnetic fields (e.g. from electric motors)!

Dimensions:

Size 1

Type [l/min]	Installation dimensions [mm]				Weight (approx.) [g]
	DN	SW	G	L	
0.5 .. 1.6	8	24	1/4"	98	610
	10	24	3/8"	119	660
	15	30	1/2" ^{*)}	90	560
0.8 .. 3.0	15	30	1/2"	90	560
2.0 .. 7.0					



^{*)} Standard

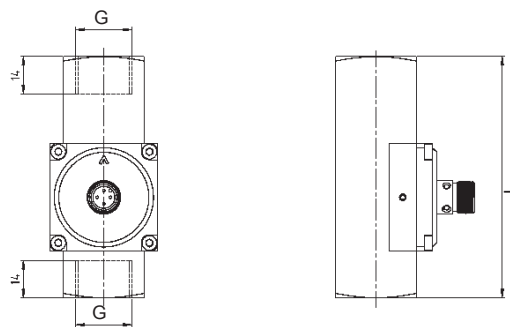

Size 2

Type [l/min]	Installation dimensions [mm]					Weight (approx.) [g]
	DN	SW	G	L	T	
0.5 .. 1.5	8	34	1/4"	152	10	1510
	15	34	1/2"	152	14	1435
1 .. 4	20	34	3/4"	152	15	1350
	25	40	1" ^{*)}	130	17	1170
2 .. 8	15	34	1/2"	152	14	1435
3 .. 10						
5 .. 15						
8 .. 24	25	40	1" ^{*)}	130	17	1170
10 .. 30	20	34	3/4"	152	15	1350
15 .. 45						
20 .. 60	25	40	1"	130	17	1170
30 .. 90						
35 .. 110	25	40	1"	130	17	1170

^{*)} Standard

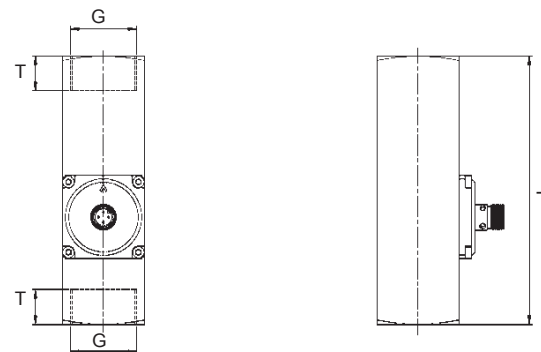

Архангельск (8182)63-90-72

Астана +7(7172)727-132

Белгород (4722)40-23-64

Брянск (4832)59-03-52

Владивосток (423)249-28-31

Волгоград (844)278-03-48

Вологда (8172)26-41-59

Воронеж (473)204-51-73

Екатеринбург (343)384-55-89

Иваново (4932)77-34-06

Ижевск (3412)26-03-58

Казань (843)206-01-48

Калининград (4012)72-03-81

Калуга (4842)92-23-67

Кемерово (3842)65-04-62

Киров (8332)68-02-04

Краснодар (861)203-40-90

Красноярск (391)204-63-61

Курск (4712)77-13-04

Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13

Москва (495)268-04-70

Мурманск (8152)59-64-93

Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12

Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73

Орел (4862)44-53-42

Оренбург (3532)37-68-04

Пенза (8412)22-31-16

Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15

Рязань (4912)46-61-64

Самара (846)206-03-16

Санкт-Петербург (812)309-46-40

Саратов (845)249-38-78

Смоленск (4812)29-41-54

Сочи (862)225-72-31

Ставрополь (8652)20-65-13

Тверь (4822)63-31-35

Томск (3822)98-41-53

Тула (4872)74-02-29

Тюмень (3452)66-21-18

Ульяновск (8422)24-23-59

Уфа (347)229-48-12

Челябинск (351)202-03-61

Череповец (8202)49-02-64

Ярославль (4852)69-52-93